


Reinforced heat shrinkable splice closure for telecommunications cables in unpressurized networks. The splice is protected by a laminated liner.

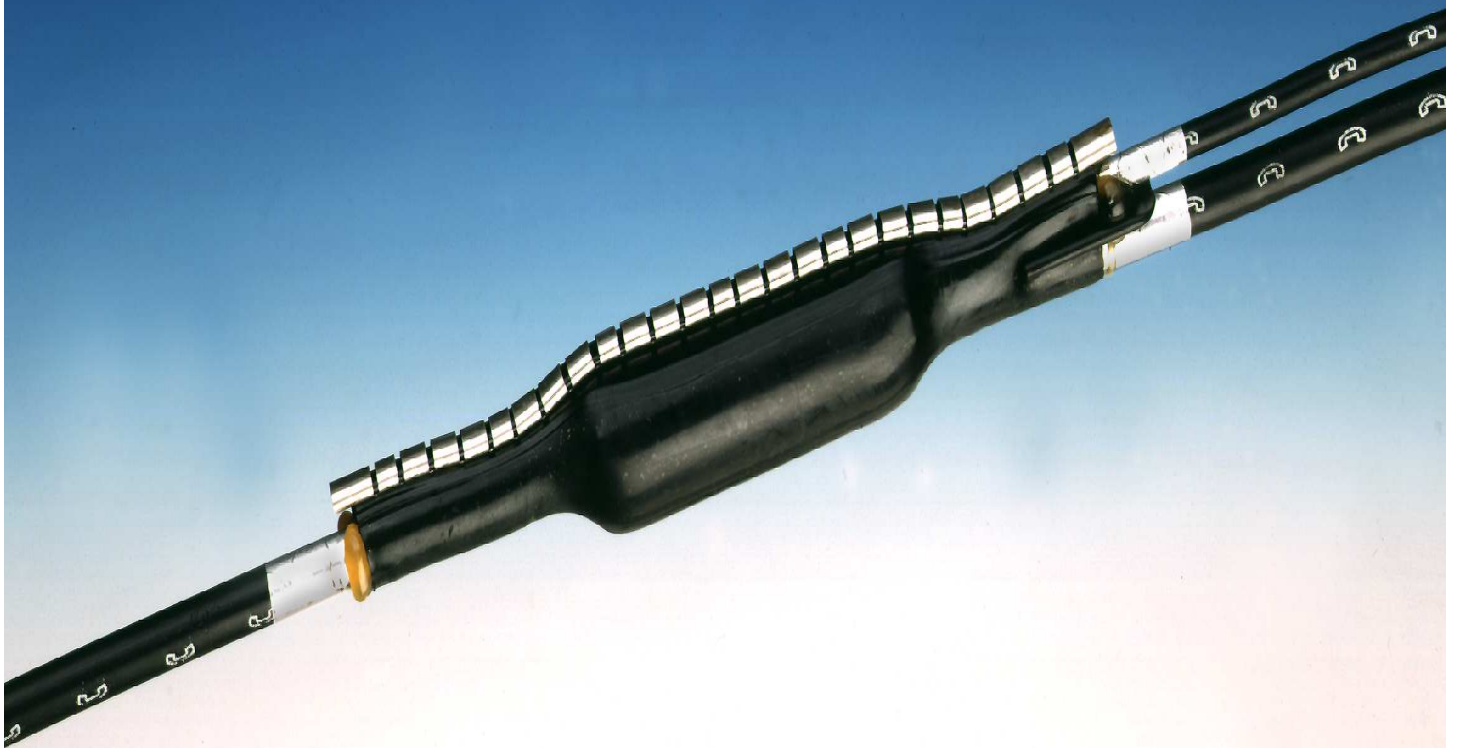


Characteristics of the GSMS

- High tensile strength during the shrinking process due to the reinforced sleeve material
- High mechanical strength due to the laminated liner
- Reliable sealing of the splice area against humidity by means of hot melt adhesive
- Max. 3 cable inlets and outlets on each side
- Simple and reliable installation without requirement of special tools

Technical information

Ordering information


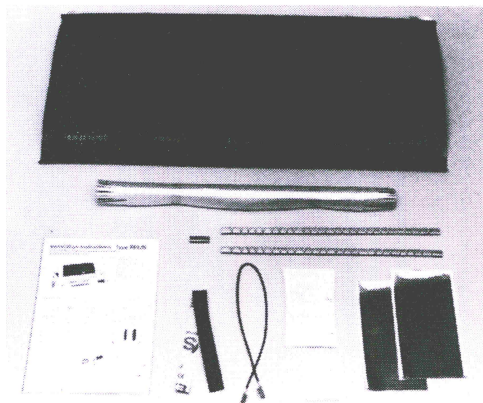


Kit contents

Reinforced heat shrinkable sleeve
Laminated liner
Flexible channel
Retention clip
Shield continuity wire
Drying agent
Aluminum tape
Cleaning cloth
Abrasive strip
Installation instruction

Branch-off kit BRK

Branch-off clip
Shield continuity wire for branch-offs
Shield continuity clip
Aluminum tape

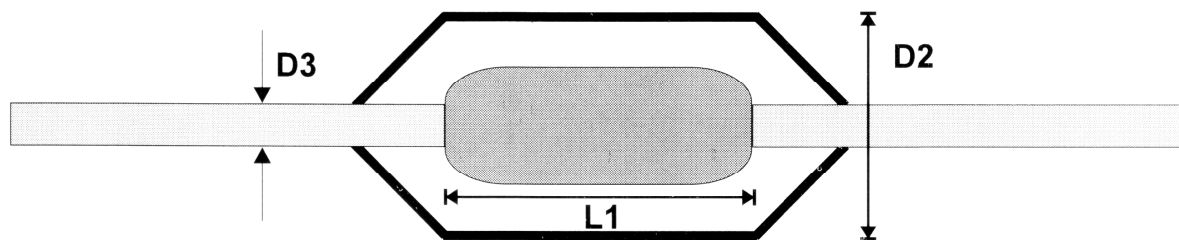

Size/Type	Sheath opening max.	Outer diameter over the liner max.	Cable diameter min.	Article No. RSMS	Branch-off kit BRK	Article No. BRK
GSMS	L1	D2	D3			
43/ 8-150	150	43	8	2016043-150	BRK1	5215927
43/ 8-300	300	43	8	2016043-300	BRK1	5215927
55/12-150	150	55	12	2016055-150	BRK1	5215927
55/12-300	300	55	12	2016055-300	BRK1	5215927
75/15-250	250	75	15	2016075-250	BRK1	5215927
75/15-300	300	75	15	2016075-300	BRK1	5215927
75/15-430	430	75	15	2016075-430	BRK1	5215927
93/25-250	250	93	25	2016093-250	BRK1	5215927
93/25-430	430	93	25	2016093-430	BRK1	5215927
93/25-530	530	93	25	2016093-530	BRK1	5215927
120/28-250	250	120	28	2016120-250	BRK1	5215927
120/28-430	430	120	28	2016120-430	BRK1	5215927
120/28-530	530	120	28	2016120-530	BRK2	5215928
137/38-430	430	137	38	2016137-430	BRK2	5215928
137/38-530	530	137	38	2016137-530	BRK2	5215928

All dimensions in mm

For branch joints please order one branch-off kit per branch separately!

All the information given herein is correct and reliable to the best of our knowledge. It does not however constitute a guarantee of any particular property. The user is responsible for evaluating the suitability and performance of the products for the particular application. Our liability with respect to the products is exclusively as set forth in our standard terms and conditions of sale, and in no event shall we be liable for any incidental, indirect or consequential damage of any kind. We reserve the right to alter the formulation of our products for technical reasons without notice.