



Heat-shrinkable splice closure system for telecommunications cables, mainly used for jointing of high-paired cables.
The cable splice is protected by a metal canister.

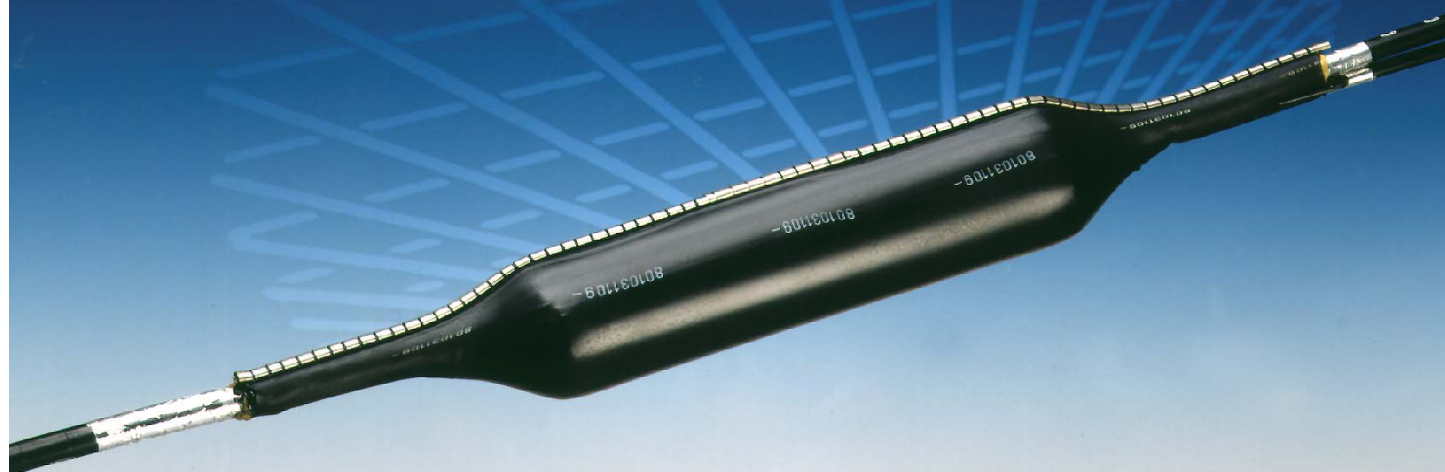

Characteristics of the RSMK



- High mechanical strength due to the metal canister
- Reliable sealing of the splice area against humidity by means of hot melt adhesive
- Maximum 3 cable outlets/inlets on each side
- Simple and reliable installation
- No special tools required
- Canister is suitable for filling with grease or resin

Ordering information, Table of application

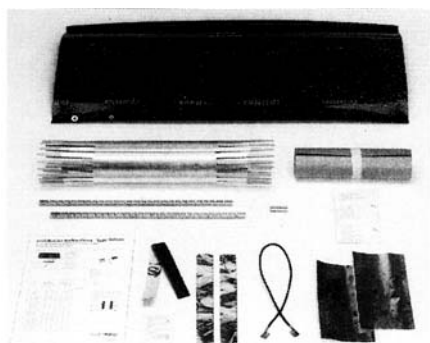

Kit contents
 Heat-shrinkable sleeve
 Metal canister
 Splice protection
 Flexible channel
 Retention clip
 Shield continuity assembly
 Drying agent
 Aluminum tape
 Cleaning cloth
 Abrasive strip
 Installation instruction

Branch-off kit BRK
 Branch-off clip
 Shield continuity assembly for branch-offs
 Shield continuity clip
 Aluminum tape

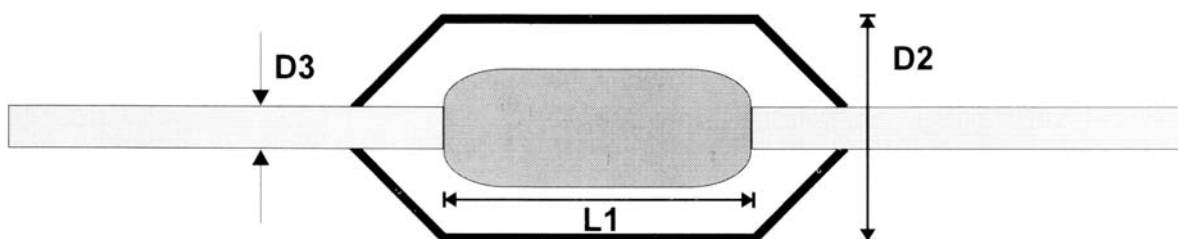

Size/Type	Sheath opening max.	Outer diameter splice protection max.	Cable diameter min.	Length of sleeve	Article No. RSMS	Branch-off kit BRK	Article No. BRK
RSMK	L1	D2	D3				
45/8-200	200	45	8	650	2015301	BRK1	5215927
45/8-300	300	45	8	750	2015302	BRK1	5215927
45/8-425	425	45	8	900	2015303	BRK1	5215927
70/20-250	250	70	20	700	2015311	BRK1	5215927
70/20-300	300	70	20	750	2015312	BRK1	5215927
70/20-425	425	70	20	900	2015313	BRK1	5215927
70/20-600	600	70	20	1100	2015314	BRK1	5215927
90/30-250	250	90	30	700	2015321	BRK1	5215927
90/30-300	300	90	30	750	2015322	BRK1	5215927
90/30-425	425	90	30	900	2015323	BRK1	5215927
90/30-600	600	90	30	1100	2015324	BRK1	5215927
125/35-300	300	125	35	850	2015331	BRK2	5215928
125/35-425	425	125	35	950	2015332	BRK2	5215928
125/35-600	600	125	35	1150	2015333	BRK2	5215928
155/55-425	425	155	55	950	2015341	BRK2	5215928
155/55-600	600	155	55	1150	2015342	BRK2	5215928
205/65-425	425	205	65	950	2015351	BRK2	5215928
205/65-600	600	205	65	1150	2015352	BRK2	5215928

All dimensions in mm

For branch-off joints please order one branch-off kit per branch-off separately!

All the information given herein is correct and reliable to the best of our knowledge. It does not however constitute a guarantee of any particular property. The user is responsible for evaluating the suitability and performance of the products for the particular application. Our liability with respect to the products is exclusively as set forth in our standard terms and conditions of sale, and in no event shall we be liable for any incidental, indirect or consequential damage of any kind. We reserve the right to alter the formulation of our products for technical reasons without notice.